


## GJS-H1203 (Black)

### 1-IN 2-OUT Fiber Optic Splice Closure

#### Application

- Suitable for aerial, manhole, direct-buried, and wall-mounted installations to protect fiber splices in FTTH and telecom drop cable networks.
- Suits drop cable connections requiring compact and high-protection solutions.

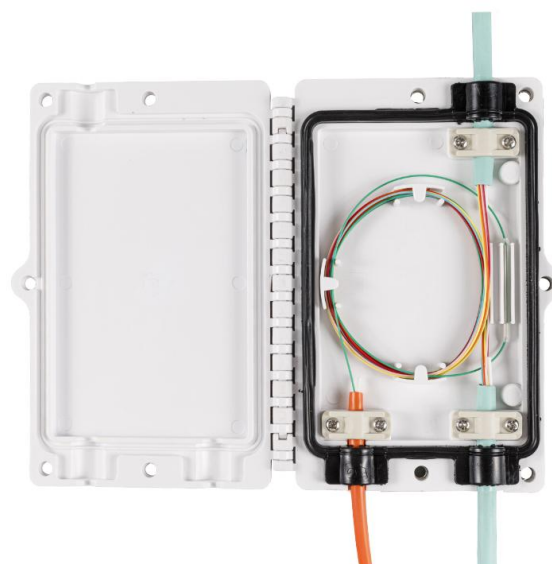

## Specifications

Part No.	GJS-H1203
Dimensions (L×W×H)	178×117×22.5 mm (7.01×4.61×0.89 in)
Material of Enclosure	MPP
Color	Black
Cable Sealing Method	Rubber Grommet
Cable Entry/Exit Ports	1 / 2 (In-line)
Cable Ports Diameter	Ø7.5mm
Splicing Capacity (Max)	2/4 Fibers (Single-core)
IP Rating	IP68
Mounting	Aerial / Wall Mount / Direct-Buried

## Features & Benefits

- Compact mini closure design (178×117×22.4 mm) for space-saving installations.
- MPP (Modified Polypropylene) housing with high mechanical strength and chemical resistance.
- 3 cable ports (max. Ø8 mm) supporting 2–4 single-core fiber splices.
- Versatile mounting options: wall-mounted or aerial-mounted with optional kits.

## Accessories

Picture	Name	Size	Quantity
	Wall-mounting Kit (for Wall Mount Only)	/	2 Pairs
	Hook Kit (for Aerial Mount Only)	/	2 Pairs
	Splice sleeve	Ø1.2*45mm	2/4 PCS
	Hex Key	M6	2 PCS/CTN

\* Standard accessories are listed Above. Additional / modified accessories can be custom-specified based on requirements.

## Packing List

Part No.	Carton Size	PCS/CTN	G.W.
GJS-H1203	55×41×27 CM	64	20 KG
GJS-H1203	55×41×27 CM	90	23 KG

