


GJS-H3350C-12T

3-IN 3-OUT In-line Fiber Optic Splice Closure

Application

- The GJS-H3350C-12T In-line Fiber Optic Splice Closure is engineered for outdoor fiber networks, enabling secure splicing and management of up to 576 fibers.
- IP68-rated to withstand harsh environments, suitable for direct-buried and aerial installations in telecom, FTTH, and large-scale fiber infrastructure projects.

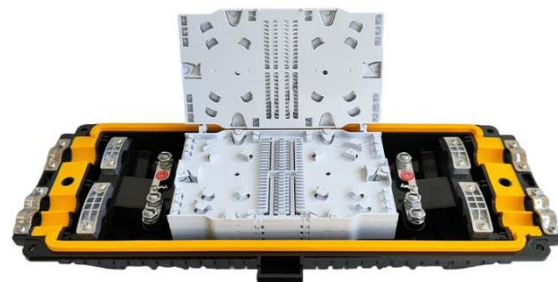

Key Features


- **Ultra-High Capacity:** 12 splice trays (24–48 fusions per tray) support a maximum of 576 fibers, meeting demands of high-density network deployments.
- **Durable Housing:** MPP construction (PC optional) offers superior resistance to UV radiation, corrosion, and mechanical impacts for long-term outdoor reliability.
- **Flexible Port Design:** 3 inlets + 3 outlets (in-line) with mixed diameters (2×Ø16 mm + 4×Ø23 mm) to accommodate diverse cable sizes.
- **Dual Sealing Protection:** Silicone seals for cable ports and mechanical seals for the closure body ensure IP68 waterproof/dustproof performance.
- **Versatile Installation:** Optimized for aerial setups (with optional hanging kit) and direct burial, adapting to varied project requirements.
- **Easy Maintenance:** Transparent splice tray covers allow visual inspection; reusable components reduce operational costs..

Specifications

Part No.	GJS-H3350C-12T
Dimensions (L×W×H)	495×175×160 mm (19.49×6.89×6.30 inches)
Material of Enclosure	PC or PC+ABS
Cable Sealing Method	Rubber Grommet
Cable Entry/Exit Ports	3 / 3 (In-line)
Port Diameter	2×Ø16 mm & 4×Ø23 mm
Splicing Capacity (Max)	576 Fibers (Single-core)
Number of Splice Trays (Max)	12 Trays
Material of Trays	ABS
Inflating Valve	Not Supported
Grounding Device	Not Supported
IP Rating	IP68
Mounting	Aerial / Direct-buried

Mounting Options

- **Aerial:** After installing the hooks on the Hex Screws at both ends on the same side of the product, hang the product on the steel cable and tighten the screws at the hooks.

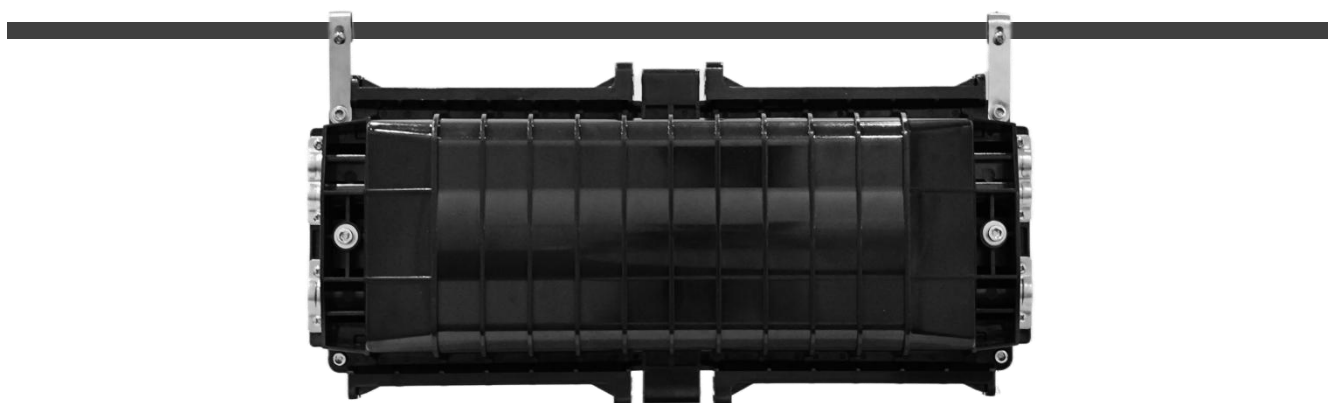

Accessories

Picture	Name	Size	Quantity
	Aerial Kit (for Aerial Only)	/	2 Pairs
	Rubber Block (Small)	Ø16mm	2 PCS
	Rubber Block (Big)	Ø23mm	4 PCS
	Nylon Cable Tie	3*100mm	10 PCS
	Splice Sleeve	1.2/45mm	288-576 PCS
	Electrical Insulation Tape	/	1 Roll
	Sealing Compound	/	1 Roll
	Hex Wrench (L Type)	M5	1 PC
	Hex Wrench (L Type)	M6	1 PC
	Nut Wrench	/	1 PC

Packing List

Part No.	Carton Size	PCS/CTN	G.W.
GJS-H3350C-12T	53×50×38 CM	4	23 KG