

GJS-M1446M

2-IN 4-OUT Mechanical Seal Dome Closure

Application


- GJS-M1446M Fiber Optic Dome Closure provides perfect solutions for the protection of fiber splice points from the environment, especially from the permeation of water.
- Rated to IP68, suitable for outdoor Aerial / Wall / Pole-mounted / Direct buried application.



Specifications

Part No.	GJS-M1446M
Max Dimensions (Including Clamp)	460 x 189 x 225mm
Material of Enclosure	PP+GF
Base Sealing Method	Dome-to-base clamp with O-ring
Cable Sealing Type	Mechanical Sealing
Cable Entry Ports	2 Mid-span Ports (Ø15-18mm)
Cable Exit Ports	4 Round Ports (Ø6-18mm)
Splice capacity (Max.)	144 Fibers (Single Core)
Number of Splice Tray (Max.)	6 Trays
IP Rating	IP68
Mounting	Aerial / Wall / Pole-mounted / Direct buried

Features & Benefits

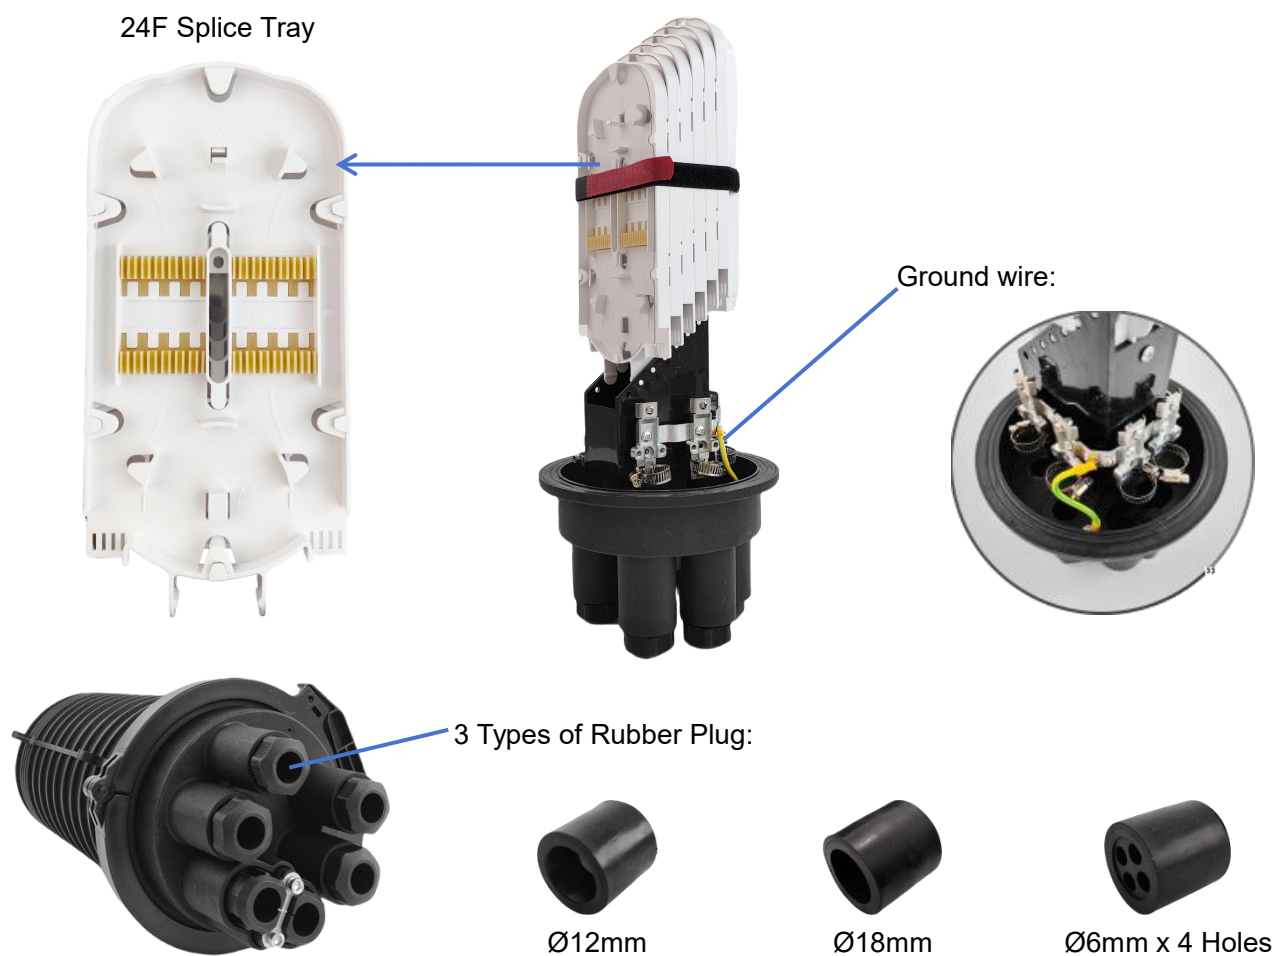

Accessories



Packing List

Part No.	Carton Size	PCS/CTN	G.W.
GJS-M1446M	48x46x46CM	4	14KGS