

GJS-M2887Q

288F Mechanical Seal Fiber Dome Closure

Application


- The GJS-M2887Q Dome Fiber Optic Splice Closure is designed to connect distribution and incoming cables in various networks, including communication systems, CATV, and broadband networks.
- Rated to IP68, for aerial, pole-mounted, wall-mounted, or direct-buried installations, offering robust protection against harsh outdoor environments..



Specifications

Part No.	GJS-M2887Q
Dimensions (LxD)	512 x Ø310.3 mm (Include clamp outer dia.)
Material of Enclosure	PP+GF
Base Sealing Method	Dome-to-base clamp with O-ring
Cable Sealing Type	Mechanical Sealing
Cable Entry Ports	2 Mid-span ports (Ø11-14mm)
Cable Exit Ports	6 Round Ports (Ø6–8mm)
Splicing Capacity (Max)	288 Fibers (Single-core)
Number of Splice Trays (Max)	24 Trays
Material of Trays	ABS
Inflating Valve	Pre-installed (Optional)
Grounding Device	Pre-installed (Optional)
IP Rating	IP68
Mounting	Aerial / Wall Mount / Pole Mount / Duct / Buried
Mount Method	Aerial, Pole, Wall-Mounted and Direct-Buried

Features & Benefits

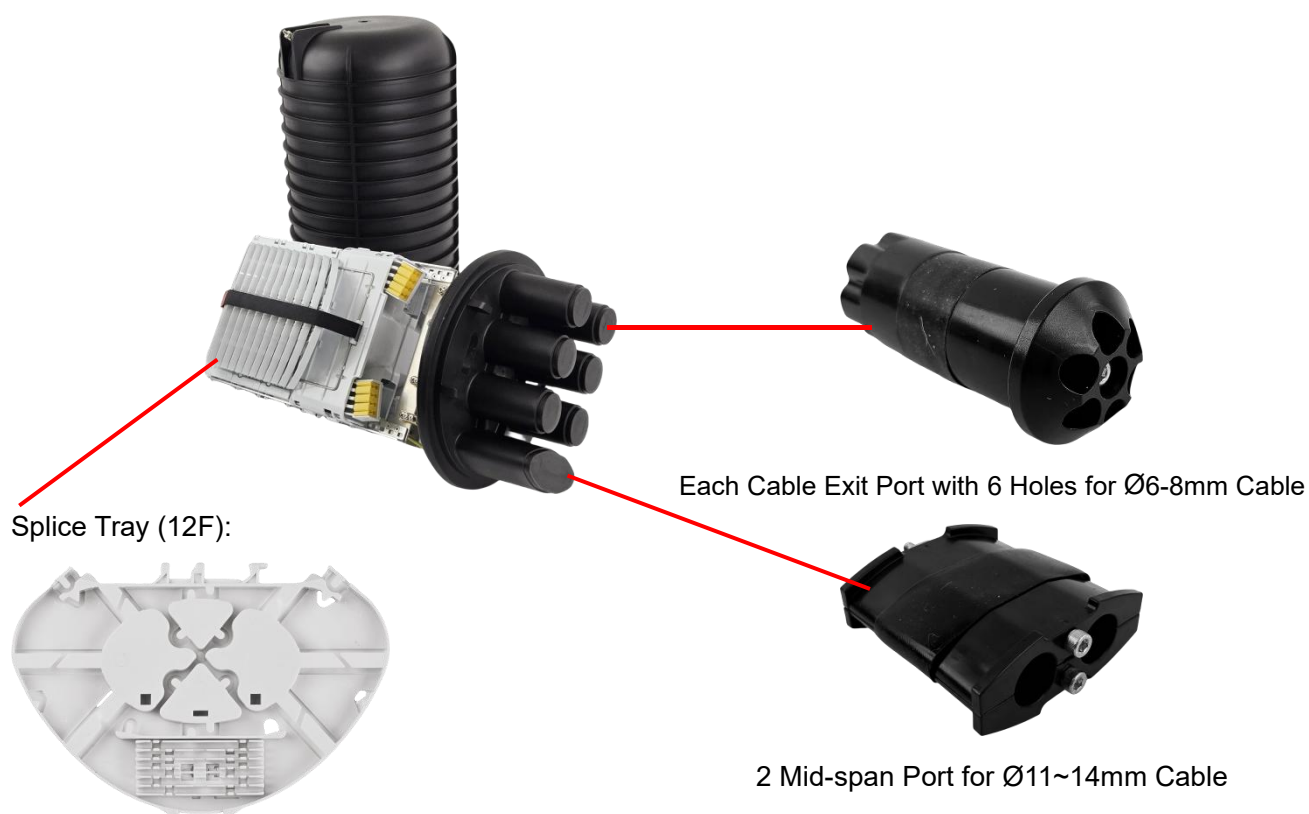

Accessories



Packing List

Part No.	Carton Size	PCS/CTN	G.W.
GJS-M2887Q	69x56x35CM	2	10KGS