

GP-T204

12 Fibers FTTx Terminal Box

Application

- This terminal box is designed for deployment in FTTx networks, offering robust mechanical safeguarding for fiber systems that handle splicing, patching, and integration of passive elements.
- It features an IP54 rating, making it versatile for both indoor and outdoor installations with reliable protection against dust and water ingress.



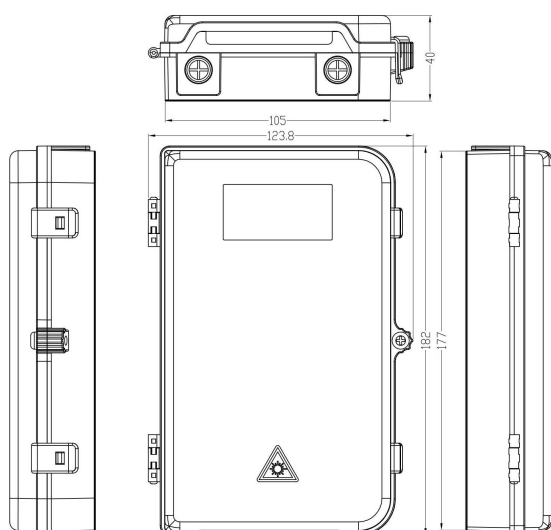
Features & Benefits

- Space-saving design, ideal for indoor or outdoor installations.
- Supports both mechanical and fusion splicing for up to 6 fibers.
- Accommodates 4 SC or duplex LC adapters and supports 1x4 or 1x8 micro PLC splitters.
- Provides resistance against dust and water, ensuring reliability in various environmental conditions.
- Features open ports and reliable cable fixing devices for quick and secure cable installations.
- Maintains a fiber bend radius greater than 30mm, ensuring efficient fiber routing.




Specifications

Part No.	GP-T204
Dimensions	182×124×40 mm
Enclosure Material	ABS or PC/ASB
Main Cable Port	3 × Ø7mm
Drop Cable Port	12 × Ø2mm
Patching Capacity	Not Supported
Splicing Capacity	12 Fibers
Splice tray	1 Tray
IP Rating	IP54
Mounting	Wall Mount

Dimension Drawing



Accessories

Picture	Name	Size	Quantity
	Wall-mounting Kit	/	2 Pairs
	Nylon Cable Tie	3×100mm	10 PCS
	Splice Sleeve	1.2/45mm	12 PCS

Packing List

Part No.	Carton Size	PCS/CTN	G.W.
GP-T204	40×28×28 CM	20	10 KGS